


SEALS+DIRECT

01425 617722 www.sealsdirect.co.uk

CST4335

WINDOW COVER STRIP FITTING TOOL

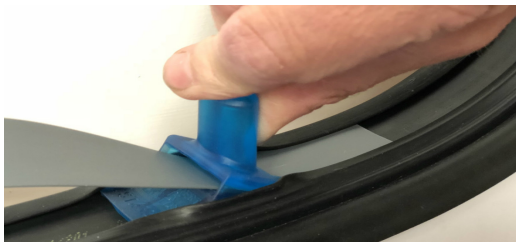

- Lubricate the inside of the rubber window seal with silicone spray SS4363.
- Insert the tool into rubber seal under the cover strip securing lips.
- Insert the grey or white cover strip through the centre of the tool and push the end back into the rubber under the lips.
- Gently move the tool forward to lay the cover strip into the rubber. Continue all of the way round the window.
- Please see our Youtube video at <https://www.youtube.com/watch?v=5kthfMx2IFA>